

COMPACT-4 SERIES

Automatic Capacitor Banks

440V, 50Hz

General Information

- Specially designed to improve reactive power in small installations: stores, neighboring communities.
- Indoor wall mounting and ventilated room.
- Inside cabinet temperature máx $\leq 55^{\circ}\text{C}$.
- Cable top entry.
- IP20

Upon request

RTR technical team can assist for designing PFC equipment's which suit to the customer needs for different power, voltage, frequency, auxiliary equipments.

Components


- DWCAP capacitors.
- Capacitor duty contactors with dumping resistors.
- General protection by MCB.
- Microprocessor based PFC regulator.
- Galvanized sheet metal cabinet and RAL

Standard

- IEC 61921
- UNE-EN 61921



Dimensions

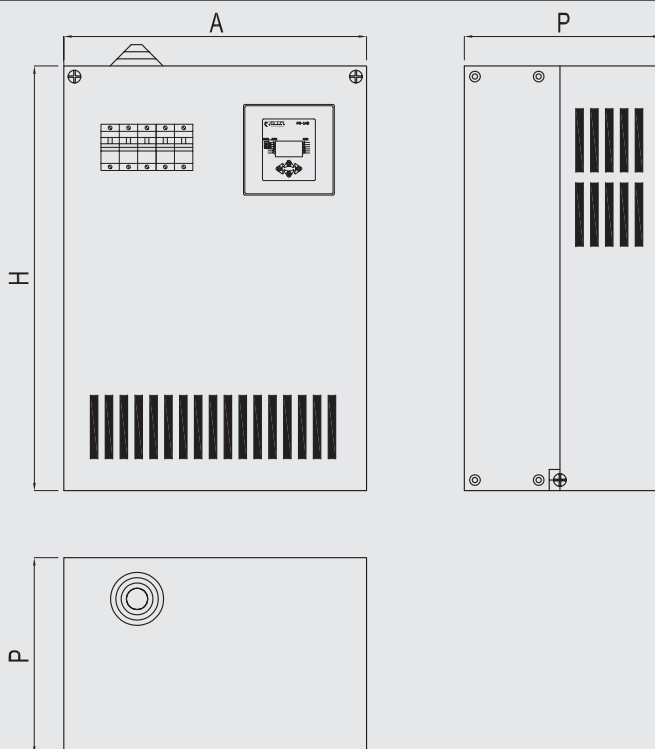

COMPACT-4 SERIES

Code	Power	Voltage	Composition	Program	Dimensions
	KVAr	V	KVAr		
4C440005025A000	5	440	2(2x2,5)	1:1	600x360x160
4C440007525A000	7,5	440	2(1x2,5+1x5)	1:2	600x360x160
4C440010035A000	10	440	3(2x2,5+1x5)	1:1:2	600x360x160
4C440012535A000	12,5	440	3(1x2,5+2x5)	1:2:2	600x360x160
4C440015035A000	15	440	3(1x2,5+1x5+1x7,5)	1:2:3	600x360x160
4C440017535A000	17,5	440	3(1x2,5+1x5+1x10)	1:2:4	600x360x160
4C440020035A000	20	440	3(1x2,5+1x5+1x12,5)	1:1:5	600x360x160
4C440022535A000	22,5	440	3(1x2,5+1x7,5+1x12,5)	1:3:5	600x360x160
4C440025035A000	25	440	3(1x5+2x10)	1:2:2	600x360x160
4C440030045A000	30	440	4(1x2,5+1x5+1x10+1x12,5)	1:2:4	600x360x160
4C440035035A000	35	440	3(1x5+1x10+1x20)	1:1:4	600x360x160
4C440037545A000	37,5	440	4(1x2,5+1x5+1x10+1x20)	1:2:4:8	600x360x160
4C440040045A000	40	440	4(2x5+1x10+1x20)	1:1:2:4	600x360x160
4C440045045A000	45	440	4(1x5+1x10+2x15)	1:2:3	600x360x160
4C440050045A000	50	440	4(1x5+1x10+1x15+1x20)	1:2:3:4	600x360x160
4C440055045A000	55	440	4(1x5+1x10+2x20)	1:2:4	600x360x160
4C440060045A000	60	440	4(1x7,5+1x12,5+2x20)	1:1,66:2,66	600x360x160
4C440062545A000	62,5	440	4(1x7,5+1x15+2x20)	1:2:2,66	600x360x160

* Others powers, voltages and frequencies upon request.